

ViewSonic® VIEWBOARD IFP7530


Key Features


- UFT (Ultra Fine Touch) Technology
- myViewBoard™ digital whiteboard software
- Dual-pen writing with 3mm/8mm diameter pen tips
- Ambient Light Sensor
- ENERGY STAR® certified



Product Description

The ViewBoard® IFP30 series embraces UFT (Ultra Fine Touch) Technology to offer more precise writing and faster processing time than traditional IR panels. 2mm height sensitivity increases writing accuracy while allowing for dual-pen annotation with both 3mm & 8mm diameter pens. It's also incredibly responsive, distinguishing the different touch diameters among pens, fingers and palms to avoid false strokes. In addition, the IFP30 series is integrated with myViewBoard™ digital whiteboard software to provide collaboration on the go, and is further complimented by native casting including Miracast, Airplay, and Chromecast. Interactive whiteboards are becoming commonplace. The IFP30 series is the solution for schools and workplaces of all sizes and considerations.

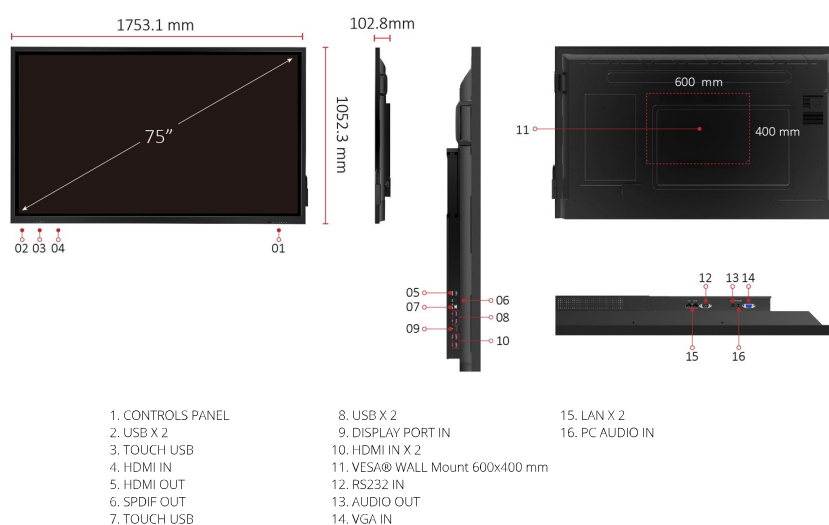

Visit Us  www.viewsonic.com

DISPLAY

Panel Size:	75"
Type/Tech:	IPS/V-by-one
Display Area (mm):	1647.36*926.64mm
Aspect Ratio:	16:9
Native Resolution:	4K60hz
Colours:	10 bits
Brightness:	450(Typ.) 400(min.)
Contrast Ratio:	1200:1
Response Time:	8ms(Type)
Viewing Angles:	H = 178, V = 178 typ.
Backlight Life:	50,000 hrs

Surface Treatment: Hardness: 7H
Coating: AG coating
Thickness: 4mm

Bezel: 29/29/29/49.7mm(btm.)

Orientation: Landscape

PLATFORM

Processor: ARM Cortex-A73*2 + Cortex-A53*2
1.5Hz

RAM: 3GB DDR4

Storage: 16GB

TOUCH

Type/ Tech: IR Recognition

Touch Resolution: 32767W*32767D

Touch Point: 20 points

INPUT

HDMI: Front*1
Rear* 2
All ports HDMI2.0

RGB / VGA: 1

DisplayPort: DP1.2*1

Audio: PC audio in (3.5 mm)*1

RS232: x1

OPS: 1

OUTPUT

HDMI: *1

Audio: 3.5mm Earphone Out *1, SPDIF*1

SPDIF: x1

LAN

RJ45: *2
10M/100

USB

Type A: USB2.0 *4 (Front:*2 Rear: *2)

Type B: For touch (Front*1, rear*1))

SPEAKERS

SPEAKERS: 15W X2

CAMERA PLATE ON TOP FOR SCREW-IN WEBCAM**INSTALLATION**

Camera plate on top for screw-in
webcam installation: yes

COMPATIBILITY

RGB PC/HDMI PC: VGA: 1080p
HDMI: 4K

HDMI: 3840x2160

DisplayPort: 3840x2160

EMBEDDED OS

Embedded OS: OS 8.0 to Android 8.0

POWER

Voltage: PB model:
100-240VAC +/- 10% Wide Range

Consumption: On: 115W(Typ.)
Off: <0.5W

ERGONOMICS

Wall Mount (VESA®): 600 x 400

OPERATING CONDITIONS

Temperature (°C): 0°C to 40°C

Humidity: 20% ~ 80% RH Non-
Condensing(working)

DIMENSIONS (W X H X D)

Physical (inch / mm): 1753.1*1052.3*102.8(mm)
69.02*41.43*4.05(inch)

Packaging (inch / mm): 1880*1160*280(mm)
74*45*11(inch)

WEIGHT

Net (lb / kg): 135lb, 61.25kg

Gross (lb / kg): 173.8lb, 78.85kg

REGULATIONS

REGULATIONS: EMC/CE-EU, CB-EU/IEC62368, RoHS
Green BOM & RoSH DoC, REACH,
WEEE (Doc & Disassembly report),
ErP, EAC(local apply),
UKrSEPRO(local apply), , BIS-India

ENERGY STAR VERSION

Energy Star version: YES

EI RATING

EI rating: A+

PACKAGE CONTENTS

PACKAGE CONTENTS: 1. US/EU/UK/AU power cord 3M, no
PE bag
2. QSG
3. Compliance statement
4. HDMI cable 3M*1
5. Touch USB cable 3M*1
6. Touch PEN *2. Extra tip: Thick*2,
thin* 1
7. Remote control with AAA batteries
(VS version)
8. Webcam plate with screws pack
a. Need to compatible with Logi
CC4000e)
b. Add screw holes on top of the
frame
9. Pen tray*1 (two pen, detachable,
mount for both side)
10. Wall mount screws

COMPATIBLE SLOT-IN PC

Compatible Slot-in PC: VPC12 series